

**PROTECTION**



 Transient Voltage Suppressor Solutions

# TVS Protection Selector Guide

Industry leading circuit protection solutions to safeguard data interfaces from ESD and surge transients

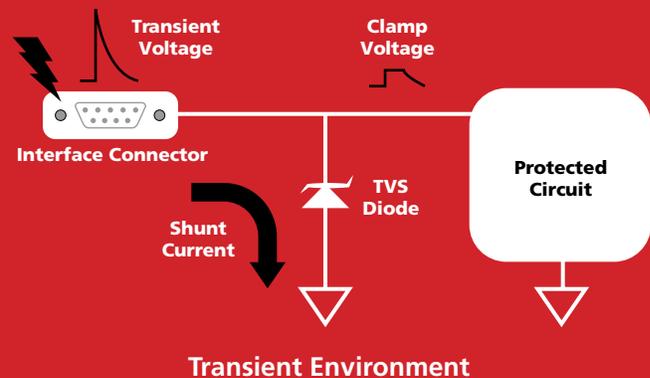
# TVS SOLUTIONS

For more than 25 years, Semtech's Protection Products Group has been on the forefront of developing cutting-edge circuit protection solutions to safeguard the various circuit buses, ports, connectors, and interfaces found in consumer products and electronic systems. Semtech's proprietary Transient Voltage Suppression (TVS) technologies lead the industry

in protecting high-speed data circuits against electrostatic discharge (ESD), electromagnetic interference, cable discharge, lightning, and power surges. These innovative devices help ensure electronics do not fail in the presence of highly destructive overvoltage threats.

## What is ESD?

Electrostatic discharge (ESD) is a natural phenomenon that occurs all around us. ESD events occur when electrons - due to friction or induction - are redistributed on a material surface in such a way to create a charge imbalance and thus an electric field. When an electric field is sufficiently strong, the static charges seek equilibrium across the potential difference, and a violent electrical zap known as an electrostatic discharge can occur. These common electrical shocks occur with such frequency that most of the time they may not even be perceptible to humans, but they can mean disaster for microelectronic-based electronics. An ESD strike and resulting failure to the electronic product may lead to lost time to market, revenue and a loss of reputation in the market for a product supplier.



## THE NEED FOR ROBUST ESD PROTECTION

The world is more connected than ever. From smartphones to tablets to smart vehicles – these devices give us constant access to real-time information and live communication. As our world becomes more connected, microelectronic chips are also becoming faster and more advanced. As this trend continues, the chips enabling these smaller, thinner and faster microelectronics must likewise scale to smaller geometries. As a result, these devices exhibit an increased sensitivity to real world ESD and transient voltage threats.

Increased device vulnerability to ESD threats, coupled with the trend in chip miniaturization, has compounded the challenge of designing adequate circuit-level ESD protection. With the increased ESD sensitivity of digital ICs, the need to protect systems with more robust off-chip/system-level TVS is more critical today than ever.

# TVS APPLICATION MATRIX

Semtech's protection products meet the industry's most rigid immunity standards, including:

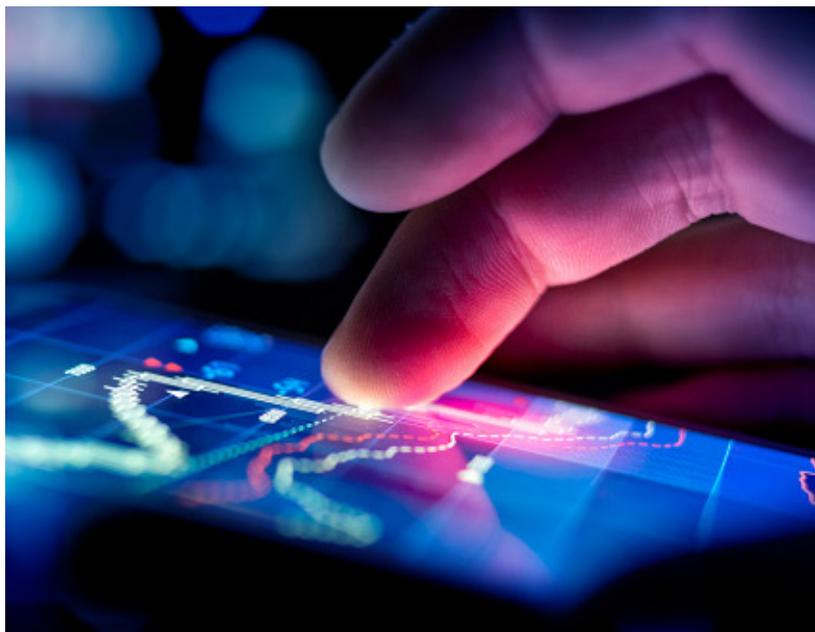
- IEC 61000-4-2 (ESD)
- IEC 61000-4-4 (EFT)
- IEC 61000-4-5 (lightning)
- Telcordia GR-1089
- ITU K.20, K.21

## FEATURES

- Sub-5V solutions: 2.5V – 3.3V
- Ultra-low capacitance devices: <math><0.5\text{pF}</math>
- Extremely low clamping voltage
- ESD protection with EMI/RFI filtering
- Single-line and multi-line protection
- Small package solutions, including Semtech's own leadless package
- High volume manufacturing
- RoHS/WEEE Compliant

## APPLICATIONS

- Portable electronics
- Ethernet
- Set top box
- HDTV/monitor interfaces
- Telecom/datacom interfaces
- Servers/desktop
- Notebooks/tablets
- Automotive interfaces (AEC-Q100 qualified)
- Wearables
- IoT nodes



# TVS SOLUTIONS

Semtech has a rich and diverse portfolio of TVS protection devices. It is helpful to think of these devices as categorized into five basic subgroups:

## **μClamp® Family (MicroClamp)**

- General purpose ESD protection
- Single-line and multi-line devices
- Used in broad markets, but more commonly in portable and handheld applications

## **RClamp® Family (RailClamp)**

- Low capacitance ESD and transient voltage protection
- Protection for high-speed lines
- Surge and ESD level protection
- Multi-market adoption: used in high-speed data lines (differential pairs) and some RF applications

## **PClamp® Family (PowerClamp)**

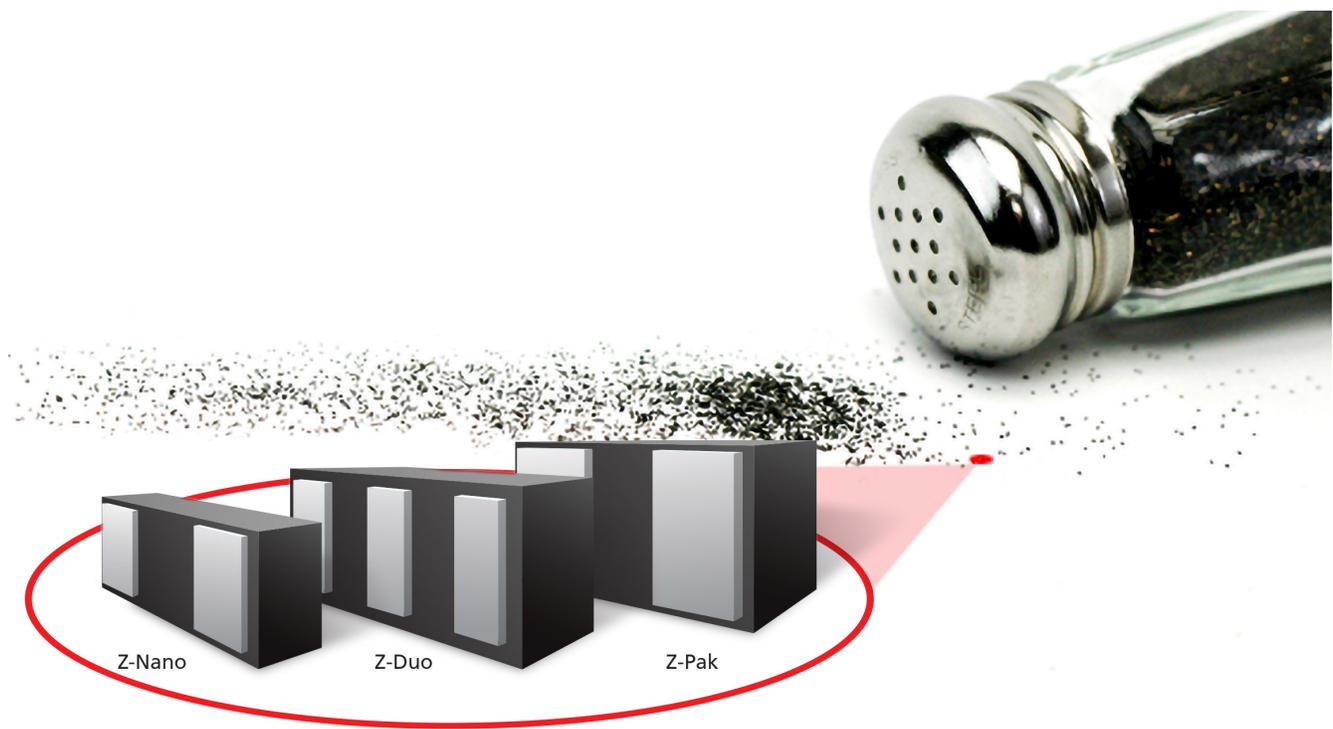
- Higher surge immunity for Vbus and DC lines
- High-surge protection (>100A 8x20μs surge events)
- Generally intended for Vbus and DC line applications

## **TClamp® Family (TransClamp)**

- High-surge, low capacitance protection
- Single-line and multi-line devices
- Targeted at telecom and some industrial applications

## **EClamp® Family (EMI Clamp)**

- ESD protection in combination with filter devices
- TVS with integrated passive components, used for EMI filtering applications
- EClamp family also features TVS and termination passives for data interfaces



## Transient Voltage Suppressors (TVS)













Part Number	T-Carrier	xDSL	Antenna	Automotive (AEC-Q100)	10/100/1000 Ethernet	Industrial Sensing	Serial/Parallel Ports	LVDS	USB 1.1/2.0/3.0/OTG	Multimedia Memory Port	Audio	Color LCD Display	VBusDC line	Keypad	HDMI/DisplayPort	Analog Video
<b>EMI Clamp® – ESD + EMI Protection Devices</b>																
EMI EClamp2357NQ				■						■						
EMI EClamp2374KQ				■										■		
EClamp2374K														■		
EClamp2376K														■		
EClamp2378K														■		
EClamp2384K														■		
EClamp2386K														■		
EClamp2388K														■		
EClamp2394P														■		
EClamp2396P														■		
EClamp2398P														■		
EClamp2410P										■						
EClamp2422N											■					
EClamp2454P														■		
EClamp2456P														■		
EClamp2458P														■		
EClamp2455K											■					
EClamp2455P											■					
EClamp2465T											■					
EClamp2515K											■					
EClamp2522P										■						
STF203-15																
STF203-22										■						
STF203-33										■						
<b>TransClamp® – High-Power Surge TVS</b>																
TClamp0602N	■	■			■											
TClamp1202P							■									
TClamp1272S		■														
TClamp2472S		■														
TClamp2482S		■														
TClamp2502N					■											■
TClamp2512N					■											
TClamp3302N		■			■											■
TClamp3312N					■											
LC01-6	■															
LC03-3.3	■				■											
LC03-6	■	■			■											
LC04-6	■	■														
LC05-6	■															
LC04-12	■	■														
<b>RailClamp® – Low capacitance TVS</b>																
RClamp0502A					■				■	■						■
EMI RClamp0582BQ					■				■	■					■	
RClamp0582N					■		■	■	■	■					■	
RClamp0504FA					■		■	■	■	■					■	
RClamp0504N	■	■			■		■	■	■	■					■	












Part Number	T-Carrier	xDSL	Antenna	Automotive (AEC-Q100)	10/100/1000 Ethernet	Industrial Sensing	Serial/Parallel Ports	LVDS	USB 1.1/2.0/3.0/OTG	Multimedia Memory Port	Audio	Color LCD Display	VBusDC line	Keypad	HDMI/DisplayPort	Analog Video
RClamp0504PA					■				■	■				■		■
RClamp0506T									■	■					■	
EMI RClamp0512TQ			■	■	■				■	■				■		■
RClamp0521PA									■	■	■					
RClamp0521Z			■						■	■					■	
RClamp0524PA									■	■			■		■	
EMI RClamp0524PQ				■					■	■			■		■	
EMI RClamp0531TQ			■	■	■											
RClamp0532T					■					■					■	
RClamp0534N					■					■						
RClamp0542T									■	■					■	
RClamp0544T									■	■					■	
RClamp0551P									■	■					■	
RClamp0552T									■	■						
RClamp0554S	■				■		■	■	■	■						■
RClamp3324T					■				■	■					■	
RClamp3354S					■				■	■						
RClamp0564P					■		■	■	■	■			■		■	■
RClamp7534P					■		■	■	■	■			■		■	■
RClamp0584J									■	■					■	
RClamp0821P									■	■	■					■
RClamp0854P									■	■						
RClamp1255P										■						
RClamp1502B									■	■						
RClamp1521P									■	■	■					■
RClamp1654P									■	■						
RClamp1851ZA									■	■						
RClamp2402B									■	■						
RClamp2451ZA									■	■						
RClamp2502L	■				■											
RClamp2504N					■				■	■						■
RClamp2504P					■				■	■						■
RClamp2574N					■				■	■						
EMI RClamp2574NQ					■				■	■						
RClamp3374N					■				■	■						
RClamp3304NA	■				■				■	■	■					■
RClamp3304P					■				■	■						■
RClamp3321P									■	■						
RClamp3324P					■	■			■	■	■					
RClamp3328P					■				■	■					■	
RClamp3331ZA									■	■						
RClamp3346P					■				■	■	■					

Part Number	T-Carrier	xDSL	Antenna	Automotive (AEC-Q100)	10/100/1000 Ethernet	Industrial Sensing	Serial/Parallel Ports	LVDS	USB1.1/2.0/3.0/OTG	Multimedia Memory Port	Audio	Color LCD Display	VBus/DC line	Keypad	HDMI/DisplayPort	Analog Video
RClamp3552T				■				■	■							
RClamp3624T									■							
RClamp3654PA									■							
RClamp7522T									■						■	
RClamp7524T									■						■	
RClamp7528T								■	■	■	■				■	
RClamp7538P								■	■	■		■			■	
RClamp0821ZA			■												■	
RClamp5031ZA			■						■	■						
RClamp3521ZA								■	■							
🚗 RClamp0551PQ			■	■					■						■	
🚗 RClamp0561PQ			■	■					■						■	
🚗 RClamp1561PQ			■													
RClamp3351ZA								■	■	■						
RClamp3371ZC				■					■						■	
RClamp3391ZC																
🚗 RClamp3331PQ			■	■				■	■							
🚗 RClamp0582NQ				■											■	■
RClamp0521ZA			■						■						■	
SR05		■				■			■							■
SR12		■														
SR2.8																■
SR3.3									■							■
SR70	■	■														■
SRDA05-4	■								■							■
SRDA12-4	■															■
SRDA3.3-4	■								■							■
SRV05-4	■				■		■	■								■
<b>MicroClamp® – TVS Arrays</b>																
🚗 μClamp0301PQ			■												■	
μClamp0501H							■							■	■	
μClamp0501P							■							■	■	
μClamp0501T							■							■	■	
μClamp0502P										■			■	■		
μClamp0502T													■	■		
μClamp0561P							■							■	■	
μClamp1061P														■	■	
μClamp1261P														■	■	
μClamp1561P														■	■	
μClamp2461P														■	■	
μClamp3061P														■	■	
μClamp3661P														■	■	
μClamp4061P														■	■	
μClamp6061P														■	■	
μClamp0504T														■	■	
μClamp0505T														■	■	
μClamp0506T														■	■	

Part Number	T-Carrier	xDSL	Antenna	Automotive (AEC-Q100)	10/100/1000 Ethernet	Industrial Sensing	Serial/Parallel Ports	LVDS	USB1.1/2.0/3.0/OTG	Multimedia Memory Port	Audio	Color LCD Display	VBus/DC line	Keypad	HDMI/DisplayPort	Analog Video
μClamp0508T							■				■				■	
μClamp0504A							■								■	
μClamp0505A							■				■				■	
μClamp0511P														■	■	
μClamp0511T									■			■	■	■	■	
μClamp0524P							■								■	
μClamp0541Z											■		■	■	■	
μClamp1201H							■							■	■	
μClamp1201P														■	■	
μClamp1211P														■	■	
μClamp1211T											■		■	■	■	
μClamp1211Z														■	■	
μClamp2401T							■							■	■	
μClamp2501T											■				■	
μClamp2511T														■	■	
μClamp2501ZA															■	
μClamp2804L					■											
μClamp3301P							■							■	■	
μClamp3304A							■								■	
μClamp3305P							■							■	■	
μClamp3306P							■							■	■	
μClamp3311P														■	■	
🚗 μClamp3311PQ				■	■										■	
μClamp3311T											■			■	■	
μClamp3321ZA											■		■	■	■	
μClamp3324P							■								■	
μClamp3381P									■							
μClamp3603T					■									■	■	
μClamp5011ZA											■		■	■	■	
SM712							■									
<b>LCDA/SLVU Families – TVS Arrays</b>																
LCDA12C-1																
LCDA15C-1		■						■								
LCDA24C-1																
🚗 SLVU2.8Q							■									■
SLVU2.8-4							■									
SLVU2.8-8							■									
<b>PowerClamp® High-surge TVS Diode</b>																
PClamp0501P										■				■		
PClamp0801P														■		■
PClamp1011P											■			■		
PClamp1021P											■			■		
PClamp1211P											■			■		
PClamp1221P											■			■		
PClamp2011P											■			■		

## Transient Voltage Suppressors (TVS)

EMIClamp® – ESD + EMI Protection Devices													
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C (pF) @ V <sub>R</sub> = 0V	C (pF) @ V <sub>R</sub> = 2.5V	R (ohm)	L (nH)	C Max (pF) L-G @ V <sub>R</sub> = 0V	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)	
 EClamp2357NQ	6-line ESD/EMI protection for secure digital card interfaces		5	6	10	–	100	–	22	0.5	16 Pin QFN	3.0 x 3.0 x 0.6	
EClamp2374K EClamp2376K EClamp2378K	4, 6, 8-line ESD/EMI protection for color LCD interfaces		5	6	10	–	100	–	24	–	SLP1713P8 SLP2513P12 SLP3313P16	1.7 x 1.3 x 0.5 2.5 x 1.3 x 0.5 3.3 x 1.3 x 0.5	
EClamp2384K EClamp2386K EClamp2388K	4, 6, 8-line ESD/EMI protection for color LCD interfaces, 400μm lead pitch		5	6	–	12	200	–	–	–	SLP1713P8 SLP2513P12 SLP3313P16	1.7 x 1.3 x 0.5 2.5 x 1.3 x 0.5 3.3 x 1.3 x 0.5	
EClamp2394P EClamp2396P EClamp2398P	4, 6, 8-line ESD/EMI protection for color LCD interfaces		5	6	–	12	–	19	–	–	SLP2116P8 SLP3016P12 SLP4016P16	2.1 x 1.6 x 0.58 3.0 x 1.6 x 0.58 4.0 x 1.6 x 0.58	
 EClamp2374KQ	4-line ESD/EMI TVS for color LCD display		5	6	20	–	100	n/a	24	0.50	SLP1713P	1.7 x 1.3 x 0.5	
EClamp2422N	2 line ESD/EMI protection for audio interfaces		5	6	100	–	–	2	–	–	SLP1510N6	1.45 x 1.0 x 0.58	
EClamp2454P EClamp2456P EClamp2458P	4, 6, 8-line ESD/EMI protection for color LCD interfaces		5	6	–	12	–	28	–	–	SLP2116P8 SLP3016P12 SLP4016P16	2.1 x 1.6 x 0.58 3.0 x 1.6 x 0.58 4.0 x 1.6 x 0.58	
EClamp2455K EClamp2455P	4-line ESD/EMI protection for SIM cards, ('K'=400μm lead pitch) ('P'=500μm lead pitch)		5	6	20	–	100 47	–	24	0.5	SLP1713P8 SLP2116P8	1.7 x 1.3 x 0.5 2.1 x 1.6 x 0.58	
EClamp2465T	4-line ESD/EMI protection for SIM card		5	6	10	–	100	–	12	0.5	SLP1713P8T	1.7 x 1.3 x 0.4	
EClamp2515K	ESD protection for T-Flash/MicroSD interfaces		5	6	22	–	45	–	–	–	SLP3313P16	3.3 x 1.3 x 0.5	
EClamp2522P	USB upstream port filter & TVS for EMI filtering and ESD protection		5.5	6	20	–	22	–	45	1	SLP1616P6	1.6 x 1.6 x 0.58	
STF203-15 STF203-22 STF203-33	USB upstream port filter & TVS for EMI filtering and ESD protection		5.25	6	47	–	22 33	–	–	5	SC-70 6L	2.1 x 2.1 x 1.1 2.1 x 2.1 x 1.1 2.1 x 2.1 x 1.1	

TransClamp® – High-Power Surge TVS												
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>J</sub> Max (pF) L-L @ V <sub>R</sub> = 0V	Peak Power (W) (8/20µs)	Peak Power (W) (10/1000µs)	I <sub>PP</sub> (A) @ (10/1000µs)	I <sub>PP</sub> (A) @ (8/20µs)	I <sub>R</sub> Max (µA) @ V <sub>RWM</sub>	Package	Size (mm)
TClamp0602N TClamp2502N TClamp3302N	2-line, low cap TVS for Ethernet and telecom interfaces		6 2.5 3.3	6.8 – –	12	2,500 – –	–	–	95	5 0.5 1	SLP2626P10	2.6 x 2.6 x 0.6 2.6 x 2.6 x 0.6 2.6 x 2.6 x 0.6
TClamp1202P	Low cap TVS for RS-485 interfaces		12	13.3	12	–	300	12	100	0.1	SLP2020P5	2.0 x 2.0 x 0.6
TClamp1272S	Low cap TVS for xDSL interfaces		12	13.5	5	600	–	–	20	0.1	SOT-23 6L	3.1 x 2.8 x 1.45
TClamp2512N TClamp3312N	2-line, low cap TVS for Ethernet and telecom interfaces		2.5V 3.3V	2.7V 3.5V	8	–	–	–	120	0.1	SLP2626P10	2.6 x 2.6 x 0.6 2.6 x 2.6 x 0.6
TClamp2472S	Low cap TVS for xDSL interfaces		24	27	2	–	–	–	–	0.1	SOT-23 6L	3.1 x 2.8 x 1.45
TClamp2482S	Low cap TVS for xDSL interfaces		24	27	2	150	–	–	20	0.1	SOT-23 6L	3.1 x 2.8 x 1.45
LC01-6	Low cap TVS for high-speed telecommunication systems		6	8	–	–	1,500	100	–	25	SO-16W	10.3 x 10.3 x 2.65
LC03-3.3	2-line, low cap 3.3V TVS for high-speed interfaces		3.3	–	12	1,800	–	–	100	1	SO-8	5.0 x 6.0 x 1.75
LC03-6	2-line, low cap TVS for high-speed data interfaces		6	6.8	12	2,000	–	–	100	25	SO-8	5.0 x 6.0 x 1.75
LC04-6 LC05-6	Dual, low cap TVS array for telecom linecard applications, protects 2 tip and ring line pairs		6	6.8	15	– 2,000	1,000 –	70 –	200 100	15	SO-16	10.0 x 6.0 x 1.75 10.0 x 6.0 x 1.75
LC04-12	Dual, low cap TVS array for telecom linecard applications, protects 2 tip and ring line pairs		12	13.3	15	600	600	25	100	2	SO-16	10.0 x 6.0 x 1.75

## Transient Voltage Suppressors (TVS)

RailClamp® – Low Capacitance TVS										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>L-L</sub> Max (pF) @ V <sub>R</sub> = 0V	Peak Power (W) (8/20µs)	I <sub>PP</sub> (A) @ (8/20µs)	I <sub>R</sub> Max (µA) @ V <sub>RWM</sub>	Package	Size (mm)
RClamp0502A	2-line, ultra-low cap TVS array		5	6	0.7	50	3	1	SC-89	1.7 x 1.7 x 0.6
RClamp0502BA RClamp1502B RClamp2402B	2-line protection, ultra-low cap TVS for ESD/CDE protection		5 15 24	6 16.7 26.7	0.9	125 200 200	5 5 4	1	SC-75	1.7 x 1.75 x 0.9 1.7 x 1.75 x 0.9 1.7 x 1.75 x 0.9
RClamp2451ZA	24V, 1-line ESD protection		24	25.5	0.45	60	3	0.05	SLP0603P2X3	0.6 x 0.3 x 0.25
RClamp0504FA RClamp0504S RClamp0504N	4-line protection, low cap TVS array		5	6	1.5 1.5 5*	150 150 300	6 6 12	3 3 5	SC-70 6L SOT-23 6L SLP2020P6	2.1 x 2.1 x 1.1 3.1 x 2.8 x 1.45 2.0 x 2.0 x 0.6
RClamp0504PA	4-line protection, low cap TVS array		5	6	1	150	6	3	SLP1616P6	1.6 x 1.6 x 0.58
RClamp0506T	6-line protection, ultra-low cap TVS for high-speed applications		5	6.5	0.4	75	5	0.1	SLP3313P6T	3.3 x 1.3 x 0.4
 RClamp0512TQ	5V, 2-line surge and ESD protection for high-speed applications		5	6.5	2	–	–	0.1	SLP1006N3T	1.0 x 0.6 x 0.4
RClamp0521PA RClamp0821P RClamp1521P	Ultra-low cap, 1-line ESD protection		5 8 15	6 10 16.7	0.5	100 100 120	4	1	SLP1006P2	1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5
RClamp0521Z	Ultra small, 1-line ESD protection		5	6	0.5	100	4	0.1	SLP0603P2X3A	0.6 x 0.3 x 0.25
RClamp3552T	2-line, low voltage, ESD protection		3.5	–	0.4	60	4	0.3	SLP0603P2X3	0.6 x 0.3 x 0.25
RClamp0522P	Protect 2 lines for high-speed applications		5	6	0.4	150	5	1	SLP1610P4	1.6 x 1.0 x 0.58
 RClamp0524PQ RClamp0524PA	Protect 4 lines for high-speed applications		5	6 6.5	0.4	150 75	5	1 0.1	SLP2510P8	2.5 x 1.0 x 0.58 2.5 x 1.0 x 0.58
 RClamp0531TQ	1-line protection, ultra-low cap TVS for automotive applications		5	6	0.8	80	4	0.1	SLP1006P2T	1.0 x 0.6 x 0.4

\* Line-to-ground capacitance (max) value

RailClamp® – Low Capacitance TVS (Continued)										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>i</sub> Max (pF) L-L @ V <sub>R</sub> = 0V	Peak Power (W) (8/20µs)	I <sub>PP</sub> (A) @ (8/20µs)	I <sub>R</sub> Max (µA) @ V <sub>RWM</sub>	Package	Size (mm)
RClamp0534N	4-line protection, low cap TVS for high-speed applications		5	6	3	500	25	0.5	SLP3020N10	3.0 x 2.0 x 0.6
RClamp0542T	Protect 2 lines for high-speed applications		5	6.5	0.4	75	5	0.05	SLP1610P4T	1.6 x 1.0 x 0.4
RClamp0544T	Protect 4 lines for high-speed applications		5	6.5	0.4	75	5	0.1	SLP2010P8T	2.0 x 1.0 x 0.4
RClamp0551P	Ultra-low cap, 1-line ESD protection		5	6	0.5	60	3	0.1	SLP1006P2	1.0 x 0.6 x 0.5
RClamp0552T	Ultra-low cap, 2-line ESD protection		5	6.5	0.4	60	3	0.02	SLP1006N3T	1.0 x 0.6 x 0.4
RClamp0564P	4-line, low-capacitance protection for high-speed interfaces		5	6.5	0.20	-	3	50	SGP2010N5	2.0 x 1.0 x 0.5
RClamp7534P	4-line, low-capacitance protection for high-speed interfaces		5	6.5	0.22	-	4	100	SGP2010N5	2.0 x 1.0 x 0.5
RClamp0554S	4 line protection, low cap TVS for high-surge applications		5	6	5*	375	25	0.5	SOT-23 6L	3.1 x 2.8 x 1.45
RClamp0582B	2-line protection, ultra-low cap TVS for high-speed applications		5	6	0.8	300	15	0.1	SC-75	1.7 x 1.75 x 0.9
 RClamp0582BQ	2 line protection, ultra-low cap TVS for automotive applications		5	6	0.8	300	15	0.1	SC-75	1.7 x 1.75 x 0.9
RClamp0582N	2 data, 1 power line protection, ultra-low cap TVS for automotive applications		6.5	7	0.5	125	5	0.1	SLP1210N6	1.2 x 1.0 x 0.58
RClamp0584J	4-line protection, ultra-low cap for high-speed applications		5	6.5	0.4	75	5	0.1	SLP2710P8	2.7 x 1.0 x 0.5

\* Line-to-ground capacitance (max) value

## Transient Voltage Suppressors (TVS)

RailClamp® – Low Capacitance TVS (Continued)										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>i</sub> Max (pF) L-L @ V <sub>R</sub> = 0V	Peak Power (W) (8/20μs)	I <sub>PP</sub> (A) @ (8/20μs)	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)
RClamp0854P	3 data line protection and 1 power line for USB charger and USB OTG		5.5	6.5	0.5	100	3	1	SLP1616P6	1.6 x 1.6 x 0.58
RClamp1654P	3 data line protection and 1 power line for USB charger and USB OTG		5.5	6.5	0.5	100	3	1	SLP1616P6	1.6 x 1.6 x 0.58
RClamp2502L	2.5V, flow-through TVS for gigabit and fast Ethernet protection		2.5	–	5	800	40	1	SO-8	5.0 x 6.0 x 1.75
RClamp2504N RClamp3304NA	4-line protection, low cap TVS array for Ethernet and telecom interfaces		2.5 3.3	–	5*	450	25	5	SLP2626P10	2.6 x 2.6 x 0.6 2.6 x 2.6 x 0.6
RClamp2504P RClamp3304P	4-line ultra-low cap TVS array		2.5 3.3	–	0.8*	80	5	0.5	SLP1616P6	1.6 x 1.6 x 0.58 1.6 x 1.6 x 0.58
 RClamp2574NQ RClamp3374N	4-line protection, high power TVS for Ethernet interfaces		2.5 3.3	–	5*	1,000	40	0.5	SLP3020N10	3.0 x 2.0 x 0.6 3.0 x 2.0 x 0.6
RClamp3321P	3.3V, 1-line ESD protection		3.3	5.5	0.35	25	3	0.05	SLP1006P2	1.0 x 0.6 x 0.5
RClamp3324P	3.3V, 4-line surge and ESD protection		3.3	–	0.4	–	4.5	0.05	SGP2510P8	2.5 x 1.0 x 0.6
RClamp3328P	3.3V, 8-line surge and ESD protection		3.3	–	0.4	75	5	0.1	SGP3810N9	3.8 x 1.0 x 0.5
RClamp3331ZA	3.3V, 1-line ESD protection		3.3	5.5	0.45	30	4	0.05	SLP0603P2X3	0.6 x 0.3 x 0.25
RClamp3346P	3.3V, 6-line ESD protection for high-speed applications		3.3	–	0.4	–	4.5	0.05	SGP2708N7	2.7 x 0.8 x 0.5










\* Line-to-ground capacitance (max) value

## RailClamp® – Low Capacitance TVS (Continued)












Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>J</sub> Max (pF) L-L @ V <sub>R</sub> = 0V	Peak Power (W) (8/20μs)	I <sub>PP</sub> (A) @ (8/20μs)	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)
RClamp3324T	3.3V, flow-through TVS for USB 3.0 interfaces		3.3	–	0.4	75	5	0.1	SLP1710P4T	1.7 x 1.0 x 0.4
RClamp3354S	4-line, 3.3V TVS for GbE interfaces		3.3	–	5*	400	25	0.5	SOT-23	3.1 x 2.8 x 1.45
RClamp3654PA	3 data line protection and 1 power line for USB charger and USB OTG		5.5	6.5	0.5	100	3	1	SLP1616P6	1.6 x 1.6 x 0.58
RClamp7522T	2-line protection, ultra-low cap TVS for high-speed applications		5	6.5	0.4	100	4	0.1	SLP1007N5T	1.0 x 0.7 x 0.4
RClamp7524T	4-line protection, ultra-low cap TVS for high-speed applications		5	6.5	0.4	75	5	0.1	SLP1308N5T	1.3 x 0.8 x 0.4
RClamp7528T RClamp7538P	8-line protection, ultra-low cap TVS for high-speed applications		5	6.5	0.4	75	5	0.1	SLP2611N9T SLP3810N9	2.6 x 1.1 x 0.4 3.8 x 1.0 x 0.5
SR05 SR12	2-line, low cap TVS diode array		5 12	6 13.3	10*	500 550	25 16	5 1	SOT-143	3.04 x 2.64 x 1.22 3.04 x 2.64 x 1.22
SR2.8 SR3.3	2-line, low cap TVS diode array		2.8 3.3	–	10*	200 150	14 10	1 1	SOT-143	3.04 x 2.64 x 1.22 3.04 x 2.64 x 1.22
SR70	2-line, low cap TVS diode array		70	85	10*	–	24	5	SOT-143	3.04 x 2.64 x 1.22
SRDA3.3-4	4-line, low capacitance TVS diode array		3.3	–	15*	500	25	1	SO-8	5.0 x 6.0 x 1.75

\* Line-to-ground capacitance (max) value

## Transient Voltage Suppressors (TVS)









RailClamp® – Low Capacitance TVS (Continued)										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>J</sub> Max (pF) L-L @ V <sub>R</sub> = 0V	Peak Power (W) (8/20μs)	I <sub>PP</sub> (A) @ (8/20μs)	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)
SRDA5-4 SRDA12-4	4-line, low capacitance TVS diode array		5 12	6 13.3	15*	500	25 20	10 1	SO-8	5.0 x 6.0 x 1.75 5.0 x 6.0 x 1.75
SRV05-4	4-line, low capacitance TVS diode array		5	6	5*	300	12	5	SOT-23 6L	3.1 x 2.8 x 1.45
RClamp0821ZA RClamp5031ZA	Ultra small low capacitance 1 line ESD protection		8 5	10 6.5	0.5 0.45	–	4	0.1 0.05	SLP0603P2X3F	0.6 x 0.3 x 0.25 0.6 x 0.3 x 0.25
RClamp3521ZA	1-line, low cap 3.5V TVS for high-speed interfaces		3.5	5.5	0.55	30	6	0.05	SLP0603P2X3F	0.6 x 0.3 x 0.25
RClamp3351ZA RClamp3371ZC RClamp3391ZC	Ultra low cap TVS for high-speed interfaces		3.3	5.5	0.6 0.25 0.2	65 65 45	10 9 7	0.05	SLP0603P2X3F SLP0603P2X3J SLP0603P2X3J	0.6 x 0.3 x 0.25 0.6 x 0.3 x 0.25 0.6 x 0.3 x 0.25
 RClamp0551PQ	Low capacitance 1 line protection of automotive interfaces		5	6	0.5	45	3	0.1	SLP1006P2	1.0 x 0.6 x 0.5
 RClamp0561PQ RClamp1561PQ	Low capacitance 1 line protection of automotive interfaces		5.5 15	6.5 16.5	0.18 0.3	40 70	2	0.05	SLP1006P2	1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5
 RClamp3331PQ	Low capacitance ESD and EOS protection		3.3	6	0.38	30	10	0.05	SLP1006P2	1.0 x 0.6 x 0.5
 RClamp0582NQ	Low capacitance 2 line ESD and EOS protection		6.5	7	0.5	125	5	0.1	SLP1210N6	1.2 x 1.0 x 0.58
RClamp0521ZA	Ultra small, 1-line ESD protection		5	6.5	–	–	2	0.1	SLP0603P2X3	0.6 x 0.3 x 0.25

\* Line-to-ground capacitance (max) value



MicroClamp® - TVS Arrays										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>J</sub> Max (pF) L-G @ V <sub>R</sub> = 0V	Peak Power (W) (8/20μs)	I <sub>PP</sub> (A) @ (8/20μs)	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)
μClampxx61P	High power, 1-line ESD and surge protection		5-40	–	220 to 125	1,200 to 1,500	80-5	0.2	SLP1608P2	1.6 x 0.8 x 0.5
μClamp0501H μClamp1201H	1-line ESD protection		5 12	6 13.3	160 60	240 200	16 8	5 1	SOD-523	1.7 x 0.9 x 0.7 1.7 x 0.9 x 0.7
 μClamp0301PQ μClamp0501P μClamp1201P	1-line ESD protection		3 5 12	– 6 13.3	30 160 60	40 200 200	5 16 8	0.5 5 1	SLP1006P2	1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5
μClamp0501T μClamp2401T	1-line ESD protection		5 24	6 27	10 50	25 150	2 3	0.25	SLP1006P2T	1.0 x 0.6 x 0.4 1.0 x 0.6 x 0.4
μClamp0502P μClamp0502T	2-line ESD protection		5	6	10	25	2	0.25	SLP1006P3 SLP1006P3T	1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5
μClamp0504A μClamp3304A	4-line ESD protection array		5 3.3	6 –	75 30	100 40	7 5	1 0.5	SC-89	1.7 x 1.7 x 0.6 1.7 x 1.7 x 0.6
μClamp0504T μClamp0505T μClamp0506T	4, 5, 6-line ESD protection		5	6	10	25	2	0.25	SLP1313P6T	1.3 x 1.3 x 0.4 1.3 x 1.3 x 0.4 1.3 x 1.3 x 0.4
μClamp0505A	5-line ESD protection array		5	6	75	100	7	1	SC-89	1.7 x 1.7 x 0.6
μClamp0506A	5-line ESD protection array		5	6	40	100	7	1	SC-89	1.7 x 1.7 x 0.6
μClamp0506P	6-line ESD protection array		5	6	75	100	7	1	SLP1616P6	1.6 x 1.6 x 0.58
μClamp0508T	8-line ESD protection		5	6	10	25	2	0.25	SLP1713P8T	1.7 x 1.3 x 0.4
SM712	300W asymmetrical 2-line 7V/12V protection in SOT23-3		7,12	7.5 13.3	75	550-700	21	0.2	JEDEC SOT-23	3.04 x 2.64 x 1.2
μClamp2501ZA	1 line 2.5V TVS diode		2.5	3	4.5	65	8	0.05	SLP0603P2X3F	0.6 x 0.3 x 0.25

## Transient Voltage Suppressors (TVS)

MicroClamp® - TVS Arrays (Continued)										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>i</sub> Max (pF) L-G @ V <sub>R</sub> = 0V	Peak Power (W) (8/20µs)	I <sub>PP</sub> (A) @ (8/20µs)	I <sub>R</sub> Max (µA) @ V <sub>RWM</sub>	Package	Size (mm)
µClamp0511P µClamp1211P µClamp3311P	1-line ESD protection		5 12 3.3	6 13.3 -	75 25 15	170 200 90	12 7 5	1 1 0.5	SLP1006P2	1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5 1.0 x 0.6 x 0.5
µClamp0511T	1-line ESD protection		5	6	7	-	2	0.05 (V <sub>R</sub> =3.3V)	SLP1006P2T	1.0 x 0.6 x 0.4
µClamp0541Z µClamp1211Z	Ultra small, 1 line ESD protection		5 12	6 14.2	9 25	25 175	2 7	0.05	SLP0603P2X3	0.6 x 0.3 x 0.25 0.6 x 0.3 x 0.25
µClamp0524P µClamp3324P	4-line, low voltage TVS for ESD protection		5 3.3	6 -	160 30	240 40	16 5	5 0.5	SLP2116P8	2.1 x 1.6 x 0.58 2.1 x 1.6 x 0.58
µClamp2501T	1-line, 2.5V TVS for ESD protection		2.5	-	30	40	5	0.05	SLP1006P2T	1.0 x 0.6 x 0.4
µClamp2511T µClamp3311T µClamp1211T	1-line ESD protection		2.5 3.3 12	- - 13.3	10 7 7	40 40 -	5 5 -	0.05	SLP1006P2T	1.0 x 0.6 x 0.4 1.0 x 0.6 x 0.4 1.0 x 0.6 x 0.4
µClamp3321ZA	1-Line ESD protection		3.3 5	5.5 6.5	0.45 5	30	4 2.5	0.05 0.02	SLP0603P2X3	0.6 x 0.3 x 0.25
µClamp2804L	4-line, 2.8V TVS array for Ethernet applications		2.8	-	-	100	10	0.05	SO-8	5.0 x 6.0 x 1.75
µClamp3301P	1-line, low voltage ESD/CDE protection		3.3	-	30	40	5	0.5	SLP1006P2	1.0 x 0.6 x 0.5
µClamp3305P	5-line, 3.3V TVS		3.3	-	25	40	5	0.5	SLP1616P6	1.6 x 1.6 x 0.58
µClamp3306P	6-line, 3.3V TVS		3.3	-	25	40	5	0.5	SLP1616P6	1.6 x 1.6 x 0.58
µClamp3311PQ	1-line, low voltage TVS for automotive applications		3.3	-	15	90	5	0.5	SLP1006P2	1.0 x 0.6 x 0.5
µClamp3381P	3.3V, 1-line ESD and surge protection		3.3	4.5	35	275	25	0.1	SGP1006N2	1.0 x 0.6 x 0.5
µClamp5011ZA	1-line ESD protection		5	6.5	5	30	2.5	0.02	SLP0603P2X3	0.6 x 0.3 x 0.25
µClamp3612P	1-line, 33V TVS for proximity switch input protection		33	36	25	170	-	1	SLP1006P2	1.0 x 0.6 x 0.5
µClamp3603T	3-line, 36V TVS for proximity switch protection		36	-	50	-	-	1	SLP1710N6T	1.7 x 1.0 x 0.4



LCDA/SLVU Families - TVS Arrays										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>J</sub> Max (pF) L-G @ V <sub>R</sub> = 0V	Peak Power (W) (8/20μs)	I <sub>PP</sub> (A) @ (8/20μs)	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)
LCDA12C-1 LCDA15C-1 LCDA24C-1	1-line, low cap TVS diode array		12 15 24	13.3 16.7 26.7	15 15 10	500	-	5 5 1	SOT-143	3.04 x 2.64 x 1.22 3.04 x 2.64 x 1.22 3.04 x 2.64 x 1.22
 SLVU2.8Q	1-line, 2.8V TVS for automotive applications		2.8	-	100	400	24	0.25	SOT-23	3.1 x 2.8 x 1.45
SLVU2.8-4	4-line, EPD TVS diode array for ESD and latch-up protection		2.8	-	-	400	24	1	SO-8	5.0 x 6.0 x 1.75
SLVU2.8-8	8-line EPD TVS diode array for ESD and latch-up protection		2.8	-	-	600	30	1	SO-8	5.0 x 6.0 x 1.75
PowerClamp® High-surge TVS Diode										
Part Number	Description	Device Schematic	V <sub>RWM</sub> Max (V)	V <sub>BR</sub> Min (V)	C <sub>J</sub> Max (pF) L-G @ V <sub>R</sub> = 0V	Peak Power (W) (8/20μs)	I <sub>PP</sub> (A) @ (8/20μs)	I <sub>R</sub> Max (μA) @ V <sub>RWM</sub>	Package	Size (mm)
P Clamp1211P	Power MicroClamp 1-line high-surge TVS diode		13.5	14.5	2,500	5,000	180	0.35	SLP2018P6	2.0 x 1.8 x 0.57
P Clamp1011P P Clamp2011P	Power MicroClamp 1-line high-surge TVS diode		10 23	12.5 27	2,500 800	4,700 5,700	180 120	0.15	SLP2018P6	2.0 x 1.8 x 0.57 2.0 x 1.8 x 0.57
P Clamp0501P P Clamp1021P P Clamp1221P	1-line surge protection		5 10 12	5 11 13	1,150 600 430	1,800 1,680 2,000	80	0.1	SGP1610N2-D	1.6 x 1.0 x 0.53 1.6 x 1.0 x 0.53 1.6 x 1.0 x 0.53
P Clamp0801P	Power MicroClamp 1 line high-surge TVS diode		7.6	7.96	1,150	500	50	5	SGP1610N2-D	1.6 x 1.0 x 0.53

# KEY APPLICATIONS

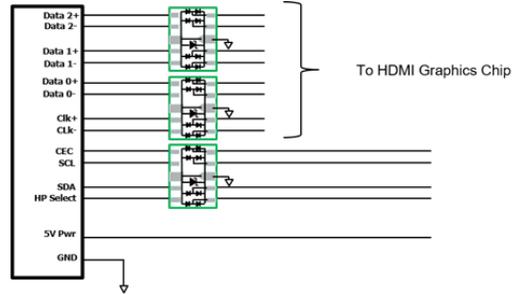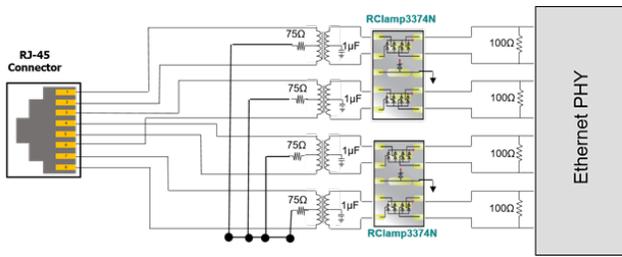

Ethernet						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp3374N	3.3	4	±30kV/±30kV	40	5	3.0 x 2.0 x 0.6
RClamp3354S	3.3	4	±30kV/±30kV	25	5	3.1 x 2.8 x 1.45
RClamp0512TQ	5.0	2	±30kV/±30kV	20	3	1.0 x 0.6 x 0.4
RClamp0582BQ	5.0	2	±30kV/±25kV	15	1.2	1.6 x 1.6 x 0.75

HDMI						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp0574P	5.5	4	±15kV/±10kV	5	0.3	2.0 x 1.0 x 0.5
RClamp0524PQ	5.0	4	±25kV/±15kV	5	1.5	2.5 x 1.0 x 0.58
RClamp0564P	5.0	4	±15kV/±10kV	3	0.2	2.0 x 1.0 x 0.5
RClamp0524PA	5.0	4	±17kV/±12kV	5	0.8	2.5 x 1.0 x 0.58
RClamp7524T	5.0	4	±30kV/±25kV	5	0.6	1.3 x 0.8 x 0.4
RClamp7534P	5.0	4	±25kV/±20kV	4	0.22	2.0 x 1.0 x 0.5

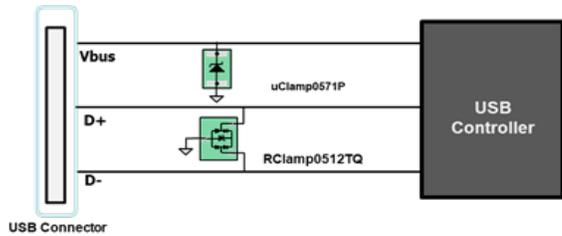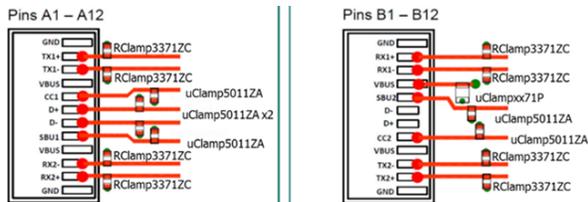


USB Type-C						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp0512TQ	5.0	2	±30kV/±30kV	20	3	1.0 x 0.6 x 0.4
RClamp3371ZC	3.3	1	±17kV/±10kV	9	0.25	0.6 x 0.3 x 0.25
μClamp5011ZA	5.0	1	±18kV/±15kV	2.5	5	0.6 x 0.3 x 0.25
μClamp2271P	22	1	±30kV/±30kV	25	165	1.6 x 1.0 x 0.57


USB 2.0						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp7522T	5.0	3	±25kV/±15kV	4	0.4	1.0 x 0.7 x 0.4
RClamp0582B	5.0	2	±30kV/±25kV	15	1.2	1.6 x 1.6 x 0.75
RClamp0512TQ	5.0	2	±30kV/±30kV	20 (tp=1.2/50us)	3	1.0 x 0.6 x 0.4
μClamp0571P	5.0	1	±30kV/±30kV	80	675	1.6 x 1.0 x 0.57
EClamp8052PQ	5.0	2	±30kV/±25kV	6	1.2	1.9 x 1.7 x 0.55

Thunderbolt3						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp3391ZC	3.3	1	±15kV/±8kV	7	0.2	0.6 x 0.3 x 0.25
RClamp1011ZC	1.0	1	±15kV/±10kV	2.5	0.2	0.6 x 0.3 x 0.25


Audio Port/Side Keys Protection						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
μClamp3321ZA	3.3	1	±17kV/±15kV	4	5	0.6 x 0.3 x 0.25
μClamp0541Z	5.0	1	±17kV/±17kV	2	9	0.6 x 0.3 x 0.25
μClamp5011ZA	5.0	1	±18kV/±15kV	2.5	5	0.6 x 0.3 x 0.25
μClamp1211Z	12	1	±30kV/±30kV	7	25	0.6 x 0.3 x 0.25

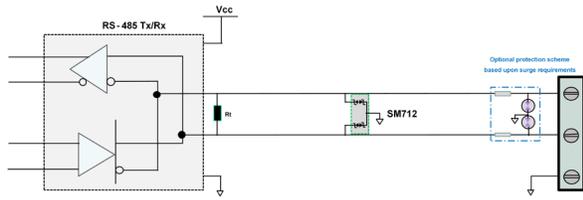


RS-485						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
SM712	12 (Pin 1 or 2 to 3) 7 (Pin 3 to 1 or 2)	2	±30kV/±30kV	21 (Pin 1 or 2 to 3) 38 (Pin 3 to 1 or 2)	75	3.04 x 2.64 x 1.2

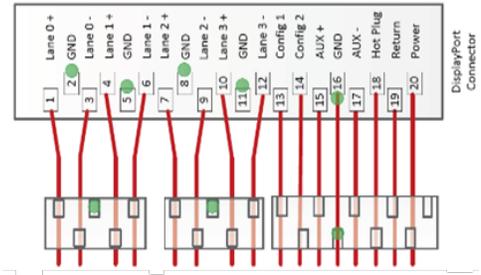


Displayport						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp0564P	5.0	4	±15kV/±10kV	3	0.2	2.0 x 1.0 x 0.5
RClamp7534P	5.0	4	±25kV/±20kV	4	0.22	2.0 x 1.0 x 0.5
RClamp7538P	5.0	8	±25kV/±20kV	5	0.6	3.8 x 1.0 x 0.5

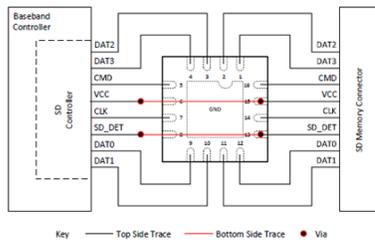

SD Card						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp3331ZA	3.3	1	±20kV/±18kV	4	0.45	0.6 x 0.3 x 0.25
RClamp3351ZA	3.3	1	±25kV/±22kV	10	0.6	0.6 x 0.3 x 0.25
PClamp0511ZV	5.0	1	±30kV/±30kV	115	275	1.0 x 0.6 x 0.25
EClamp2357NQ	2.5	6	±20kV/±12kV		22	3.0 x 3.0 x 0.6
EClamp2367NQ	5.0	6	±15kV/±12kV		12	3.0 x 3.0 x 0.6


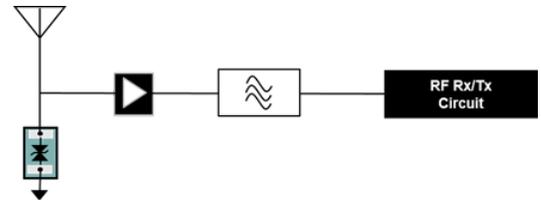


Antenna						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp3331PQ	3.3	1	±30kV/±30kV	10	0.38	1.0 x 0.6 x 0.5
RClamp0521PA	5.0	1	±15kV/±12kV	4	0.5	1.0 x 0.6 x 0.5
RClamp0531T	5.0	1	±20kV/±12kV	4	0.8	1.0 x 0.6 x 0.4
RClamp2451ZA	24	1	±18kV/±14kV	4	0.45	0.6 x 0.3 x 0.25
RClamp1521P	15	1	±15kV/±8kV	4	0.5	1.0 x 0.6 x 0.5

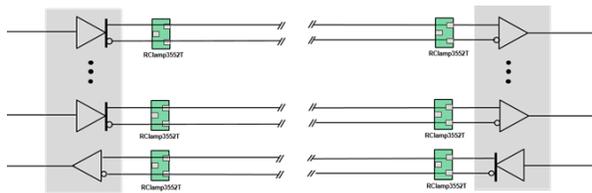

Low Voltage Differential Signaling (LVDS)						
Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
RClamp3552TQ	3.5	2	±20kV/±17kV	4	0.4	1.0 x 0.6 x 0.4
RClamp3324PQ	3.3	4	±20kV/±17kV	4.5	0.65	2.5 x 1.0 x 0.6
RClamp3331PQ	3.3	1	±30kV/±30kV	10	0.38	1.0 x 0.6 x 0.5

## Transient Voltage Suppressors (TVS)

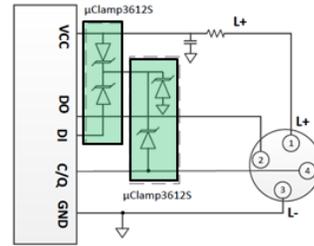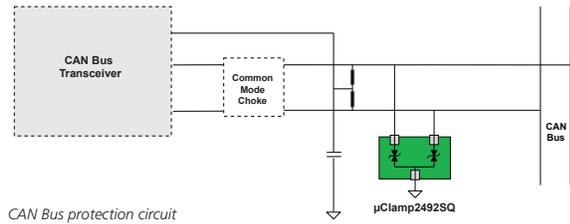

### CAN Bus Protection

Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
 µClamp2492SQ	24	2	±30kV/±30kV	5	18	2.9 x 2.8 x 1.25

### IO-Link & Proximity Switch Protection

Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
SDC36C	33	2	±15kV/±8kV	4	120	3.04 x 2.64 x 1.2
µClamp3603T	36	3	±20kV/±15kV	16	120	1.7 x 1.0 x 0.4

### USB VBus

Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
PClamp0501P	5	1	±30kV/±30kV	120	1150	1.6 x 1.0 x 0.53
PClamp1021P	10	1	±30kV/±30kV	80	600	1.6 x 1.0 x 0.53
PClamp1211P	13.5	1	±30kV/±30kV	180	2500	2.0 x 1.8 x 0.57
PClamp1221P	12	1	±30kV/±30kV	80	530	1.6 x 1.0 x 0.53
PClamp1011P	10	1	±30kV/±30kV	180	2500	2.0 x 1.8 x 0.57
PClamp2011P	23	1	±30kV/±30kV	120	800	2.0 x 1.8 x 0.57

### VBus Protection

Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
µClamp0571P	5	1	±30kV/±30kV	80	675	1.6 x 1.0 x 0.57
µClamp0871P	8	1	±30kV/±30kV	65	475	1.6 x 1.0 x 0.57
µClamp1071P	10	1	±30kV/±30kV	60	350	1.6 x 1.0 x 0.57
µClamp1271P	12	1	±30kV/±30kV	45	275	1.6 x 1.0 x 0.57
µClamp1571P	15	1	±30kV/±30kV	40	220	1.6 x 1.0 x 0.57
µClamp1871P	18	1	±30kV/±30kV	35	225	1.6 x 1.0 x 0.57
µClamp2271P	22	1	±30kV/±30kV	25	165	1.6 x 1.0 x 0.57
µClamp2671P	26	1	±30kV/±30kV	23	155	1.6 x 1.0 x 0.57
µClamp3671P	36	1	±30kV/±30kV	18	150	1.6 x 1.0 x 0.57

### Optical Modules Protection

Part Number	Vrwm	Lines	ESD Rating (Air/Contact)	Surge (8x20us) (A)	Cap (pF)	Size (mm)
µClamp0511P	5	1	±15kV/±8kV	12	75	1.0 x 0.6 x 0.5
µClamp3381P	3.3	1	±30kV/±30kV	25	35	1.0 x 0.6 x 0.5
RClamp7524T	5	4	±30kV/±25kV	5	0.6	1.3 x 0.8 x 0.4
RClamp0524T	5	4	±15kV/±8kV	5	0.8	2.5 x 1.0 x 0.4

## SEMTECH CORPORATION



Semtech Corporation is a leading supplier of high performance analog, mixed-signal semiconductors and advanced algorithms for high-end consumer, enterprise computing, communications, and industrial equipment. Semtech, publicly traded since 1967, is listed on the Global Select Market under the symbol SMTC and has more than 32 sales and application support offices in 15 countries as well as representatives and distribution support locations in more than 30 countries.

Semtech is dedicated to providing proprietary platforms, differentiated by innovation, size, efficiency, performance, and reach. Our solutions are used in some of the most innovative systems and products in the fastest growing markets today.

These markets include smartphones, LCD TVs, notebooks, tablets, smart grid, automotive, automatic meter reading, medical, wireless infrastructure, PON, Internet of Things, optical transport, and datacenters. More than 5,000 customers worldwide rely on our diverse product portfolio and world class technology roadmap for solutions in low-power wireless communications, optical data transport, video broadcasting, power management, circuit protection, touch sensing, and more, making Semtech one of the most balanced semiconductor companies in the industry.

## CUSTOMER CONTACT & KEY SALES OFFICES

### CORPORATE HEADQUARTERS

Camarillo, California  
805-498-2111

### NORTH AMERICA

San Jose, California  
408-324-3300

San Diego, California  
858-614-6700

Burlington, Ontario  
289-856-9200

Saint-Laurent, Quebec  
514-446-2400

### EUROPE

Rapperswil, Switzerland  
+ 41-55-588-1120

Bristol, England  
+ 44-1454-462200

Meylan, France  
+ 33-485-881582

Hallbergmoos, Germany  
+ 49-811-998-728-0

### ASIA

Seoul, Korea  
+ 82-2-527-4377

Tokyo, Japan  
+ 81-3-5719-7560

Beijing, China  
+ 86-10-6410-8517

Shanghai, China  
+ 86-21-6391-0830

Shenzhen, China  
+ 86-755-8282-8515

Taipei, Taiwan  
+ 886-2-2748-3380

Manila, Philippines  
+ 63-2-271-1691

Ipoh, Malaysia  
+ 60-5-501-4800

Penang, Malaysia  
+ 60-4-202-2642

Bhubaneswar, India  
+ 91-674-398-1400



For a detailed list of sales representatives in your area please visit

[semtech.com/sales](http://semtech.com/sales)

Follow Semtech on Social Media



200 Flynn Road, Camarillo, California 93012 • Phone: 805-498-2111